

THE MAKEUP LIGHT

SPL 55-2 LED



This luminaire specifically developed for professional workplaces in the make-up room is equipped with 2 LED systems: 2700 K for warm-white incandescent lamp light and 6000 K for cold-white daylight (discharge lamps). Thus, a correct colour perception of the respectively used make-up colours is ensured for the expected lighting situations on stage or on the film set. Continuous dimming and colour temperature setting allows optimum adaptation to the particular working environment. The used LED driver modules guarantee absolutely flicker-free light. The master-slave system allows the control of up to 2 slave luminaires on one master luminaire. This luminaire is designed for highest demands and meets all requirements for a professional use in studios and theatres.




Project pictures



For more information on our products and services, please refer to www.arnoldlicht.de

SPL 55-2 LED FUNCTIONAL AND HIGH QUALITY

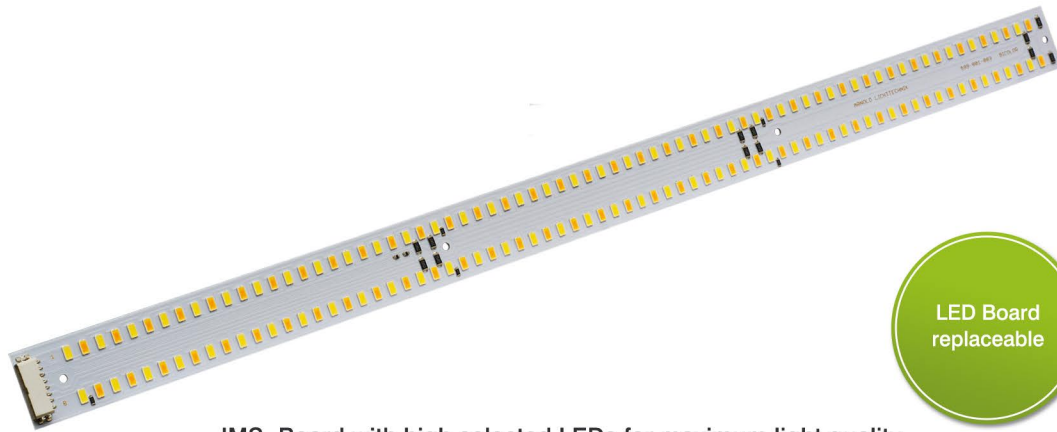

LED Board
replaceable

IMS- Board with high selected LEDs for maximum light quality



Control- Panel of the Master- Luminaire

| | |
|-------------------------------|--|
| Luminaire material | Steel 1,5mm, powder coated RAL 7035 light-grey |
| Equipping | 2 x 72 SMD LEDs 2700K / 6000K |
| Operating voltage | 120 - 250V AC |
| Power consumption | 33 W (65 W at BOOST) |
| Illuminance | 600 lux at 125 cm distance / 1200 lux at BOOST |
| Beam angle | approx. 120° / very soft, diffuse |
| Colour rendering index | CRI above 90, typically 93 |
| Connection type | fixed mounting |
| Dimming | smooth from 10 - 100% |
| Colour temperature | smooth from 2700K - 6000K |
| Efficiency | Energy efficiency class A |
| Dimension | 670 x 223 x 190 mm (H x W x D) |
| Weight | 5,5 kg |

Changes in technical parameters and design reserved.