

LED MUSIC STAND LIGHT NPL 1624




OPTIMUM MUSIC STAND LIGHTING,
AVAILABLE IN VARIOUS
CONTROL CONCEPTS



36 pcs. SMD- LEDs and a special diffusor allow uniform and optimum illumination of the entire sheet of music – even with large extendable music stands. The music stand lights of the series 1624 have one adjustable luminaire head, who is equipped with the luminous colours 3000 K warm white as well as 5600 K cool white. The two luminous colours can be mixed, switched and dimmed – depending on the choosen control concepts. A comprehensive range of accessories is available for the mechanical adaptation to different music stand makes.



3000 K

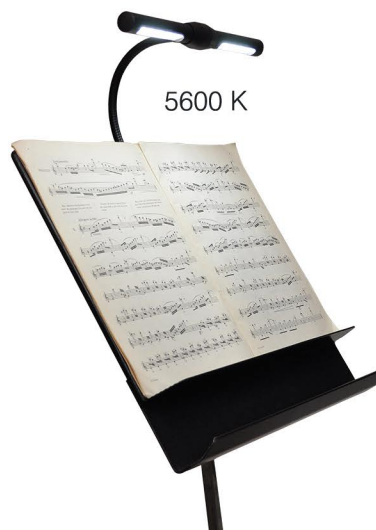

5600 K



For more information on our products and services, please refer to www.arnoldlicht.de

NPL 1624 LED MUSIC STAND LIGHT FOR ORCHESTRAS



Electronic housing model NT (digital)
 (with 7-segment address display and IR sensor, DMX controllable with power supply SPY 600 NT)

Color switching for model LX or N
 (by means of a switch, or magnetic sensor for LX)

The model N works with 24 V DC and is dimmable by using DMX LED dimmer SPY2440 (analog voltage regulation).

Luminaire material	Aluminium milled, anodized / flexible hose, laquered
Equipping	36 x SMD LEDs, warmwhite (3000 K) / coolwhite (5600 K), optional 1 colour
Operating voltage	Model LX: 24 V AC (dimmable) NT: 24 V DC (digital) N: 24 V DC (dimmable)
Power consumption	9 W per light colour, up to 18 W power consumption at model NT and N
Beam angle	approx. 80 ° / very soft, diffuse light cone / poor stray light / glare-free
Colour rendering index	CRI above 90, typically 93
Adjustment	Flexible hose adjustable in all directions / flexible height adjustment
Fixation	Square luminaire base, universal clamp or individual adaptations
Connection type	XLR connector 4-pin or 10 mm coaxial stage plug BS01 / X-Plug
Control	Model LX: 24 V AC phase-angle-control / NT: digital / N: 24 V DC dimmed
Illuminance	1200 lux at 30 cm distance, soft diffuse (one light colour)

Changes in technical parameters and design reserved.